

SafeSIGN

Catalog Number	
Notes	Type

INTENDED USE

Ideal for building code and supplementary applications, including those requiring attractive, quick installation exit signs. Perfect in areas where electrical wiring is difficult, unavailable or not suitable. **NO WIRING, NO ELECTRICITY, and NON-RADIOACTIVE.**

CONSTRUCTION

Made of High-Quality Aluminum sheeting, The All-Aluminum box housing is impact-resistant, water-proof, corrosion-proof, and flame-retardant. The High-Brightness photoluminescent material is applied directly onto the aluminum box without the use of resin or plastic. It is non-radioactive, non-toxic, flame-retardant, high temperature resistant. SafeSIGN photoluminescent technology provides uniform illumination across the sign.

INSTALLATION

Universal (Top and End/Edge) bracket mounting, Housing secures to the mounting bracket with 4 screws. Surface mounting with 4 screws.

Install SafeSIGN photoluminescent EXIT signs only in locations, where an external illumination source is present, is deemed reliable and is supplied by a circuit not controlled by automatic timers or sensors, and whose controls are accessible only to authorized personnel. This reliable external illumination source is to be energized at all times during building occupancy.

LEGIBLE VIEWING DISTANCE : 50 feet

CHARGING LIGHT SOURCE

5 foot-candles of fluorescent illumination must be present on the sign face at all times during building occupancy. After it is exposed under to this light for 60 minutes, it will be visible and legible in total darkness to observers standing 75 feet away from the sign at least 90 minutes after all light has been extinguished

OPERATIONAL LIFE EXPECTANCY : 20 YEARS +
Product longevity depends on maintaining the original integrity of the product.

LISTING

UL Listed (standard). meets and exceeds the observation visibility criteria required for UL-924 "Emergency Lighting and Power Equipment" meets NFPA Life Safety Code 101 requirements.
ULC Listed to ULC/ORD-924-02 for Canada

WARRANTY

5 years Manufacturer's Limited Warranty against material defect and workmanship.

PRODUCT CARE : Periodically clean the sign facing with a damp cloth, and conduct periodic inspections to ensure the sign is clear and visible.

UL924 PHOTOLUMINESCENT EXIT SIGN

UC03 SERIES

Brushed Aluminum Finish with Luminous EXIT letters
Includes two adjustable Directional Indicators

BX2

Box Frame



Green




Red




LISTED

PHOTOLUMINESCENT
EXIT SIGN
FWBX
(UL 924)

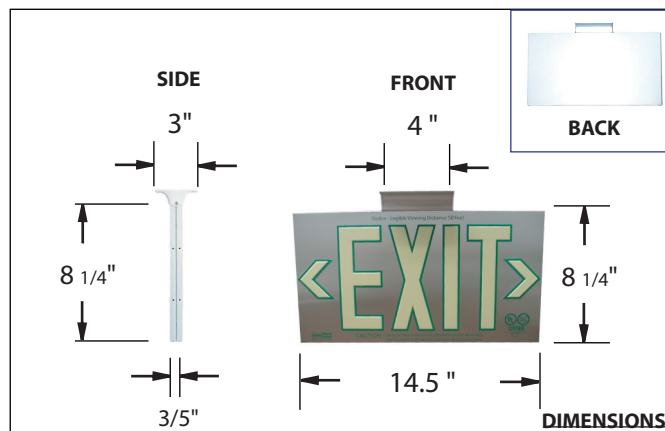

ORDERING INFORMATION

EXAMPLE : **UC03A3720-BX2-RD-1-BR**
UC03A3720-BX2-GN-1-BR

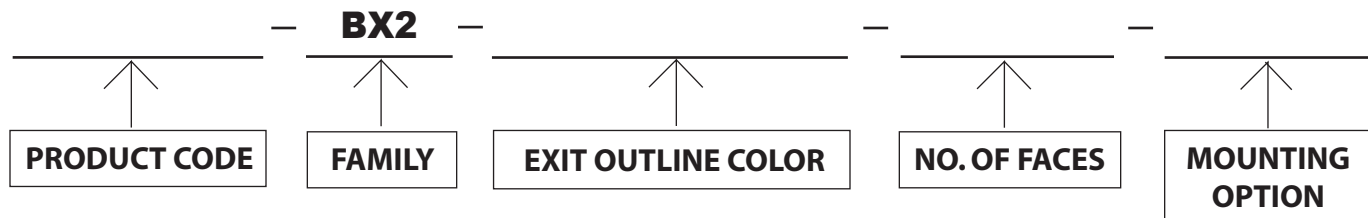

UC03A3720
- EXIT Luminous
With RED or
or GREEN outline
for the EXIT letters.

BX2 - BOX

RD - RED
GN - GREEN

1 - SINGLE
2 - DOUBLE

BR - UNIV. BRACKET KIT
(For Top & End Mount)
SM - SURFACE MOUNT KIT